




FlexScan® S2110W

53 cm (21.1") TFT Color LCD Monitor



- Widescreen format with 1680 × 1050 resolution.
- Smooth playback of motion picture images with 8 ms midtone response time (16 ms black white).
- 1000:1 contrast ratio produces a “pure” black and brings out the depth and richness in colorful images.
- Direct backlight system achieves an LCD TV equivalent brightness of 450 cd/m².
- EIZO-developed integrated circuit with 14-bit processing for smoother, more accurate gradations of color, especially in the dark tones.
- Independent control of hue and saturation for primary (red, green, blue) and secondary (cyan, magenta, yellow) colors.
- Tilt, swivel, and height adjustment over an arc-shaped range of movement with the ArcSwing 2 stand.
- Touch sensitive electrostatic switches on front panel.
- Dual DVI-I inputs accept analog and digital signals.
- Two USB downstream ports on left side of monitor for quick connection to peripherals.
- Industry-leading five year warranty.




Movement range of ArcSwing 2 Stand

Specifications

Panel Size and Type	53 cm (21.1") TFT color LCD panel
Viewing Angles (H, V)	178°, 178° (at contrast ratio of 10:1)
Brightness / Contrast	450 cd/m ² / 1000:1
Response Time	16 ms (typical)
Midtone Response Time	8 ms
Native Resolution	1680 × 1050
Active Display Size (H × V)	453.6 × 283.5 mm
Viewable Image Size	Diagonal: 534 mm
Pixel Pitch	0.270 × 0.270 mm
Display Colors	16.77 million from a palette of 1.06 billion
Cabinet Colors	White, Black
Dot Clock	Analog: 150 MHz, Digital: 120 MHz
Input Signals	Analog: RGB Analog, Digital: DVI Standard 1.0
Input Terminals	DVI-I 29 pin × 2 (switchable)
Power Requirements	AC 100 – 120 V, 200 – 240 V: 50 / 60 Hz
Power Consumption	80 W (typical)
Power Save Mode	Less than 2 W
Height Adjustment Range	95 mm
Tilt / Swivel	60° Up, 5° Down / 172° Right, 172° Left
Dimensions (W × H × D)	With Stand: 501 × 341.1 – 459.5 × 230 mm Without Stand: 501 × 355 × 85 mm
Net Weight	With Stand: 8.2 kg Without Stand: 5.8 kg
Certifications and Standards	TCO'03 (white), TCO'99 (black) TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, UL (cTÜVus), CSA (cTÜVus), FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA ENERGY STAR®, CCC, EIZO Eco Products 2004
Supplied Accessories	AC power cord, signal cables (DVI-D – DVI-D, DVI-I – D-Sub mini 15 pin), USB cable, EIZO LCD Utility Disk (HTML user's manual, ScreenManager Pro for LCD ¹ , ICC Profile), setup guide, 4 screws for mount option, warranty registration card

¹ ScreenManager Pro for LCD is compatible with the Microsoft® Windows® 98SE/Me/2000/XP operating systems only.

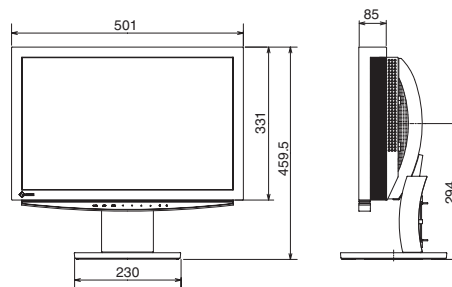

With current LCD technology, a panel may contain a limited number of missing or flickering pixels.

All product names and logos are trademarks or registered trademarks of their respective companies.
EIZO and FlexScan are registered trademarks of Eizo Nanao Corporation.
Specifications are subject to change without notice.
© 2005 Eizo Nanao Corporation.

EIZO NANAO CORPORATION

153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan

Phone +81-76-277-6792 Fax: +81-76-277-6793

www.eizo.com